
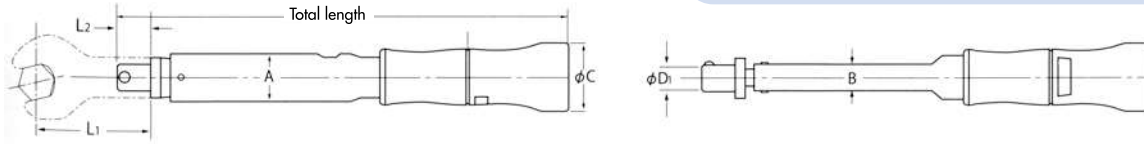


BCK ADJUSTABLE, REPLACEABLE HEAD TORQUE WRENCHES WITH RUBBER GRIP

Freely replace heads according to work applications. The combination of replaceable heads and torque adjustability make this series extremely versatile.

FEATURES


- Ring, ratchet, open end wrench and hex drive heads are available.
- The torque can be set to any value within the capacity range.
- Models are available ranging from 20 kgf·cm to 1,400 kgf·cm.
- Accuracy : ±3% of indicated value over the full range

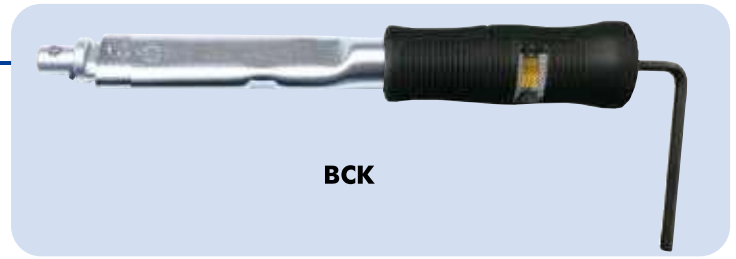


Model (kgf·cm)	Range	Increment	Model (N·m)	Range	Increment	Square drive	Total length	Dimensions (mm)						Weight
								Head			Body			
	kgf·cm	kgf·cm		N·m	N·m	mm	mm	φD1	L1	L2	A	B	φC	kg
250BCK	50~250	2	N25BCK	5~25	0.2	9.53(3/8")	205	10	45	13	18.2	9.6	29	0.2
500BCK	100~500	5	N50BCK	10~50	0.5	9.53(3/8")	227	12	55	16	25	11.4	35	0.35
1000BCK	200~1000	10	N100BCK	20~100	1	12.7(1/2")	318	15	65	18	27.5	12.4	38	0.58
1400BCK	200~1400	10	N140BCK	20~140	1	12.7(1/2")	356	15	65	18	27.5	12.4	38	0.66

HEADS OPTIONAL REPLACEABLE HEADS


NCK



QCK-LR (Ratchet head)



MCK (Open End head)



■ NCK Nut outside dia.

Unit : mm

Model	Nut outside dia.	T	C	L	L1	φD1	φD2	Applicable torque wrench
100NCK3032	30 ~ 32	5	2.3	81	65	15	28	1000LCK, N100LCK, 1000SPCK, N1005PCK, 1000, 1400GCK, N100, N140GCK, 1000BCK, 1400BCK, N100BCK, N140BCK, DTC-1000REV, DTC-N100REV, DTC-P1800REV, DLT-N100-UC
100NCK3438	34 ~ 38	6	2.5	85			29	
100NCK4042	40 ~ 42	6	2.5	88			29.5	
100NCK4548	45 ~ 48	6.5	2.5	91			29.5	
100NCK5055	50 ~ 55	6.5	2.5	94			33.5	
200NCK5865	58 ~ 65	7.5	3	112	80	18	33.5	2000LCK, N200LCK, 2000SPCK, N2005PCK, 2000GCK, N200GCK, DTC-2000REV, DTC-N200REV, DTC-PF100REV, DLT-N200-UC
200NCK6570	65 ~ 70	7.5	3	112			34	
200NCK7075	70 ~ 75	8	3.5	117			34.5	
200NCK8085	80 ~ 85	8.5	3.5	121			34.5	
200NCK92100	92 ~ 100	8.5	4	126			34.5	

■ QCK-LR

Unit : mm

Model	Sq. drive	S	H	G	R	L1	φD1	φD2	Applicable torque wrench
700QCK-LR	19.05 (3/4")	68	70	20	34	125	30	41	N560LCK, N700LCK
1000QCK-LR	25.4 (1")	76	85	27	38	130	34	45	N850LCK, N1000LCK

■ MCK

Unit : mm

Model	Nut outside dia.	S	φD1	L1	T1	T2	Applicable torque wrench
50MCK	10 ~ 26	49	12	57	10	5.5	N50GCK, N50BCK, N50LCK, N50HYK
100MCK	10 ~ 30	59	15	65	12	6	N100GCK, N140GCK, N100BCK, N100LCK, N100HYK
200MCK	17 ~ 38	67	18	80	13	6.5	N200GCK, N200LCK, N200HYK