

# SGK TORQUE GAUGES


Capable of accurately measuring very low torque values.




\* Peak indicator is optional

## FEATURES

- Due to their miniature design and light weight, these gauges are convenient and easy to carry.
- A three part chuck with knurled surface enables firmly gripping even odd shapes.
- The inset scale face helps avoid incidental damage.
- The gauges measure clockwise and counterclockwise.
- With scales on the sides and the face, torque readings can be obtained either way.
- Accuracy :  $\pm 6\%$  of the indicated value over the full range

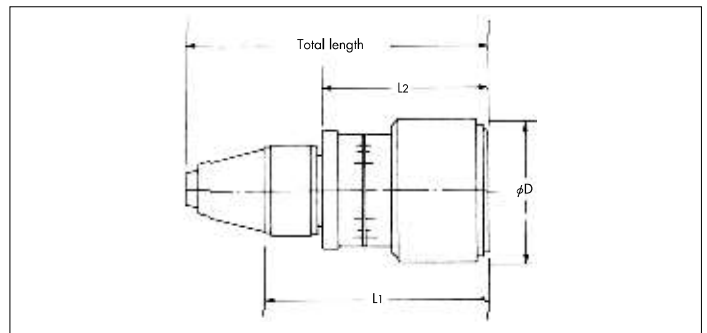

## USING AN SGK GAUGE



Starting torque can be measured with the chuck gripping a knob or shaft of an electronic device.  
Rotate clockwise or counterclockwise.

(Rotate CW or CCW)



- If you would like SGK with a peak indicator, please specify "SGK-G" on your purchase order.  
ex). CN150SGK-G

### Three part chuck

Model (gf·cm/kgf·cm)	Range (CW/CCW)	Increment	Old Model (mN·m/cN·m)	New Model (mN·m/cN·m)	Range (CW/CCW)	Increment	Chucking dia.	Total length	Dimensions (mm)			Weight
									Grip dia.	Total length (without chuck)		
	gf·cm/kgf·cm				mN·m/cN·m		φ mm	mm	φD	L1	L2	kg
90(I)SGK	10 ~ 90	2	N90(I)SGK	MN95GK	1 ~ 9	0.2	1 ~ 6.5	106	43	81	57.5	0.29
150(I)SGK	20 ~ 150	2	N150(I)SGK	MN155GK	2 ~ 15	0.2						
300(I)SGK	40 ~ 300	5	N300(I)SGK	MN305GK	4 ~ 30	0.5						
600(I)SGK	50 ~ 600	10	N600(I)SGK	MN605GK	5 ~ 60	1						
1200(I)SGK	100 ~ 1,200	20	N1200(I)SGK	MN1205GK	10 ~ 120	2						
2400(I)SGK	200 ~ 2,400	50	N2400(I)SGK	MN2405GK	20 ~ 240	5						
1.5(II)SGK	0.1 ~ 1.5	0.02	N1.5(II)SGK	CN155GK	1 ~ 15	0.2	1 ~ 8.5	134	63	100	73	0.6
2.4(II)SGK	0.2 ~ 2.4	0.02	N2.4(II)SGK	CN245GK	2 ~ 24	0.2						
3.6(II)SGK	0.4 ~ 3.6	0.05	N3.6(II)SGK	CN365GK	4 ~ 36	0.5						
6(II)SGK	0.5 ~ 6	0.1	N6(II)SGK	CN605GK	5 ~ 60	1						
9(II)SGK	1 ~ 9	0.2	N9(II)SGK	CN905GK	10 ~ 90	2						
15(II)SGK	1 ~ 15	0.2	N15(II)SGK	CN1505GK	10 ~ 150	2						

\*    is the new model that is applied from 1st January, 2016.