


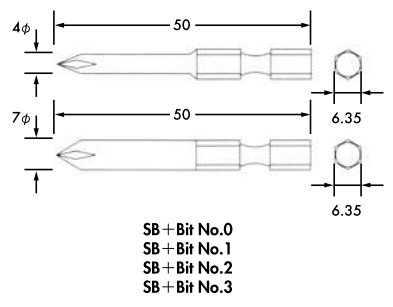



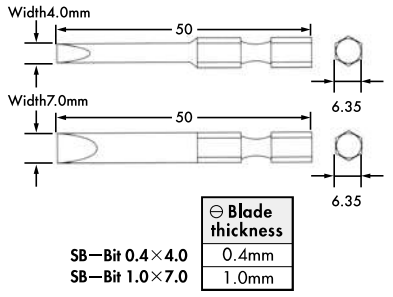



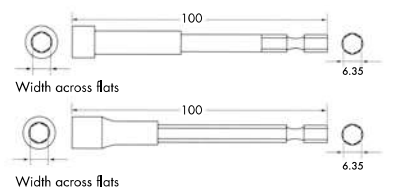



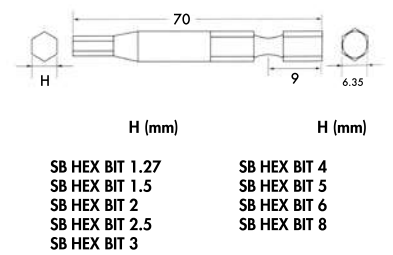


BITS

BITS FOR TORQUE DRIVERS

Type	CB type (KANON original)	OB type (KANON original)	SB type (Standard)
Applicable driver	CN15,CN30LTDK CN15,CN30STDK	1.5LTDK,3LTDK	CN60,120,200,300,500LTDK,N10LTDK CN15,30LTDK-H,1.5,3LTDK-H 6,12,20,30,50,100LTDK CN60,120,200,300,500STDK,N10STDK 6,12,20,30,50,100STDK CN100,200,500DPSK,CN100,200,500DPSK-L 10,20,50DPSK,10,20,50DPSK-II CN10,20,50DPSK-H,1,2,5DPSK-H
 Phillips	 <p>CB+Bit No.00 CB+Bit No.0</p> <p>CB+Bit No.1 CB+Bit No.2</p>	 <p>OB+Bit No.00 OB+Bit No.0 OB+Bit No.1 OB+Bit No.2</p>	 <p>SB+Bit No.0 SB+Bit No.1 SB+Bit No.2 SB+Bit No.3</p>
 Slot Drive	 <p>Blade thickness 0.4mm</p> <p>CB-Bit 0.4×3.5</p>	 <p>Blade thickness 0.4mm</p> <p>OB-Bit 0.4×3.5</p>	 <p>Blade thickness 0.4mm 1.0mm</p> <p>SB-Bit 0.4×4.0 SB-Bit 1.0×7.0</p>
 BOX BITS (Female type)	 <p>Width of across flat (mm)</p> <p>CB BOX BIT 3 CB BOX BIT 4 CB BOX BIT 5 CB BOX BIT 5.5 CB BOX BIT 6</p>	 <p>Width of across flat (mm)</p> <p>OB BOX BIT 3 OB BOX BIT 4 OB BOX BIT 5 OB BOX BIT 5.5 OB BOX BIT 6</p>	 <p>Width of across flat (mm)</p> <p>SB BOX BIT 4 SB BOX BIT 5 SB BOX BIT 5.5 SB BOX BIT 6 SB BOX BIT 7 SB BOX BIT 8</p> <p>SB BOX BIT 10 SB BOX BIT 12 SB BOX BIT 13 SB BOX BIT 14</p>
 HEX BITS (Male type)	 <p>H (mm)</p> <p>CB HEX BIT 1.27 CB HEX BIT 1.5 CB HEX BIT 2 CB HEX BIT 2.5 CB HEX BIT 3</p>	 <p>H (mm)</p> <p>OB HEX BIT 1.27 OB HEX BIT 1.5 OB HEX BIT 2 OB HEX BIT 2.5 OB HEX BIT 3</p>	 <p>H (mm)</p> <p>SB HEX BIT 1.27 SB HEX BIT 1.5 SB HEX BIT 2 SB HEX BIT 2.5 SB HEX BIT 3</p> <p>SB HEX BIT 4 SB HEX BIT 5 SB HEX BIT 6 SB HEX BIT 8</p>