

# SPCK PRE-SET, REPLACEABLE HEAD TORQUE WRENCHES


Work at a set torque value can proceed smoothly while using various replaceable heads.

## FEATURES

- Replaceable ratchet, open end wrench, ring, and hex drive heads are available.
- Pre-set torque wrench well suited for repetitive jobs at the specified torque value.
- Accuracy :  $\pm 3\%$  of pre-set value

## USING AN SPCK

Mount the head on the drive.

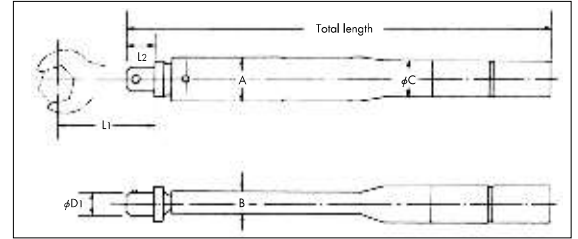

Model (kgf·cm)	Range (kgf·cm)	Old Model (N·m)	New Model (N·m)	Range (N·m)	Total length (mm)	Dimensions (mm)						Weight (kg)	Replaceable heads
						Head			Body				
						$\phi D1$	L1	L2	A	B	$\phi C$		
60SPCK	20~60	N60SPCK	N6SPCK	2~6	161	10	45	13	18.2	9.6	15	0.15	12QCK, 25 (QCK, SCK, RCK, HCK)
120SPCK	40~120	N120SPCK	N12SPCK	4~12									
250SPCK	50~250	N250SPCK	N25SPCK	5~25	196	12	55	16	25	11.4	20	0.19	25 (QCK, SCK, RCK, HCK)
500SPCK	100~500	N500SPCK	N50SPCK	10~50	220								
1000SPCK	200~1,000	N1000SPCK	N100SPCK	20~100	312	15	65	18	27.5	12.4	21.7	0.27	50 (QCK, SCK, RCK, HCK)
2000SPCK	400~2,000	N2000SPCK	N200SPCK	40~200	428								
2800SPCK	600~2,800	N2800SPCK	N280SPCK	60~280	590	22	100	27	38	16	30	0.57	100 (QCK, SCK, RCK, HCK, NCK)
4400SPCK	600~4,400	N4400SPCK	N440SPCK	60~440	893								
												1.7	280 (QCK, SCK, RCK, HCK)
												2.6	440 (QCK, SCK, RCK)

# SPCKH, SPCKA PRE-SET, REPLACEABLE HEAD TORQUE WRENCHES WITH RUBBER GRIP

Work at a set torque value can proceed smoothly while using various replaceable heads.



## Optional Replaceable Heads (Refer to the page 10)



■ H-type : The end cap is removed with a slotted screwdriver to adjust torque.

Model (kgf·cm)	Range (kgf·cm)	Old Model (N·m)	New Model (N·m)	Range (N·m)	Total length (mm)	Dimensions (mm)						Weight (kg)	Replaceable heads
						Head			Body				
						$\phi D1$	L1	L2	A	B	$\phi C$		
60SPCKH	20~60	N60SPCKH	N6SPCKH	2~6	161	10	45	13	18.2	9.6	26.5	0.17	12QCK, 25 (QCK, SCK, RCK, HCK)
120SPCKH	40~120	N120SPCKH	N12SPCKH	4~12									
250SPCKH	50~250	N250SPCKH	N25SPCKH	5~25	196	12	55	16	25	11.4	32.7	0.21	25 (QCK, SCK, RCK, HCK)
500SPCKH	100~500	N500SPCKH	N50SPCKH	10~50	220								
1000SPCKH	200~1,000	N1000SPCKH	N100SPCKH	20~100	312	15	65	18	27.5	12.4	37	0.3	50 (QCK, SCK, RCK, HCK)
												0.62	100 (QCK, SCK, RCK, HCK, NCK)

■ A-type : Adjusted setting torque value by hex wrench.

Model (kgf·cm)	Range (kgf·cm)	Model (N·m)	Range (N·m)	Total length (mm)	Dimensions (mm)						Weight (kg)	Replaceable heads	
					Head			Body					
					$\phi D1$	L1	L2	A	B	$\phi C$			
60SPCKA	20~60	N6SPCKA	2~6	161	10	45	13	18.2	9.6	26.5	0.17	12QCK, 25 (QCK, SCK, RCK, HCK)	
120SPCKA	40~120	N12SPCKA	4~12										
250SPCKA	50~250	N25SPCKA	5~25	196	12	55	16	25	11.4	32.7	0.21	25 (QCK, SCK, RCK, HCK)	
500SPCKA	100~500	N50SPCKA	10~50	220									
1000SPCKA	200~1,000	N100SPCKA	20~100	312	15	65	18	27.5	12.4	37	0.3	50 (QCK, SCK, RCK, HCK)	
												0.62	100 (QCK, SCK, RCK, HCK, NCK)

\*   is the new model that is applied from 1st January, 2016.