

LCK

ADJUSTABLE, REPLACEABLE HEAD TORQUE WRENCHES


Freely replace heads according to work applications. The combination of replaceable heads and torque adjustability make this series extremely versatile.

FEATURES

- Ring, ratchet, open end wrench and hex drive heads are available.
- The torque can be set to any value within the capacity range.
- Models are available ranging from 20 kgf·cm to 15,000 kgf·cm.
- Accuracy : $\pm 3\%$ of indicated value over the full range



LCK

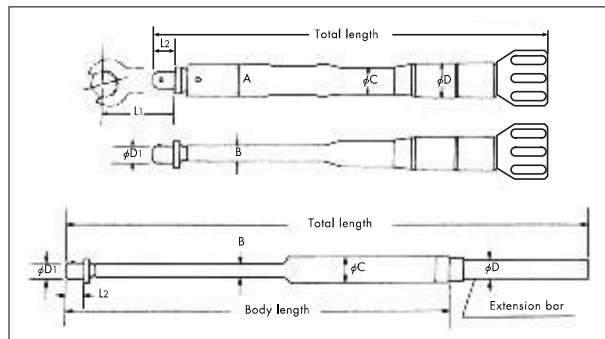

Model (kgf·cm/kgf·m)	Range	Increment	Old Model (N·m)	New Model (N·m)	Range	Increment	Total length mm	Dimensions (mm)							Weight kg	Replaceable heads	
								Head			Body						Body length
	kgf·cm/kgf·m	kgf·cm/kgf·m			N·m	N·m		phi D1	L1	L2	A	B	C	D			
60LCK	20 ~ 60 kgf·cm	1 kgf·cm	N60LCK	N6LCK	2 ~ 6	0.1	174	10	45	13	18.2	9.6	15			0.18	12QCK, 25 (QCK, SCK, RCK, HCK)
120LCK	40 ~ 120 //	2 //	N120LCK	N12LCK	4 ~ 12	0.2										0.21	25 (QCK, SCK, RCK, HCK)
250LCK	50 ~ 250 //	2 //	N230LCK	N25LCK	5 ~ 25	0.2	208	12	55	16	25	11.4	20			0.38	50 (QCK, SCK, RCK, HCK)
500LCK	100 ~ 500 //	5 //	N450LCK	N50LCK	10 ~ 50	0.5	238									0.6	100 (QCK, SCK, RCK, HCK, NCK)
1000LCK	200 ~ 1000 //	10 //	N900LCK	N100LCK	20 ~ 100	1	331	15	65	18	27.5	12.4	21.7			1.35	200 (QCK, SCK, RCK, HCK, NCK)
2000LCK	400 ~ 2,000 //	20 //	N1800LCK	N200LCK	40 ~ 200	2	455	18	80	22	34	15.4	27.2			1.81	280 (QCK, SCK, RCK, HCK)
2800LCK	400 ~ 2,800 //	20 //	N2800LCK	N280LCK	40 ~ 280	2	653	22	100	27	39	16	30			2.8	440 (QCK, SCK, RCK)
4400LCK	6 ~ 44 kgf·m	0.2 kgf·m	N4400LCK	N440LCK	60 ~ 440	2	908									4.1	700 (QCK, SCK, RCK)
5600LCK	8 ~ 56 //	0.3 //	N5600LCK	N560LCK	80 ~ 560	3	1086	30	125	45	43.5	18	34	27.2	876	5.1	
7000LCK	10 ~ 70 //	0.5 //	N7000LCK	N700LCK	100 ~ 700	5	1206	34	130	47	54	23	42.7	31.8	984	7.2	1000 (QCK, SCK, RCK)
8500LCK	10 ~ 85 //	0.5 //	N8500LCK	N850LCK	100 ~ 850	5	1267									7.5	
10000LCK	10 ~ 100 //	0.5 //	N10000LCK	N1000LCK	100 ~ 1,000	5	1417	38	160	60	66	26	51	40	1003	13.5	2100QCK, 1500 (SCK, RCK)
15000LCK	20 ~ 150 //	1 //	N14000LCK	N1500LCK	200 ~ 1,500	10	1700										

GCK

ADJUSTABLE, REPLACEABLE HEAD TORQUE WRENCHES WITH RUBBER GRIP


Freely replace heads according to work applications. The combination of replaceable heads and torque adjustability make this series extremely versatile.

FEATURES

- Ring, ratchet, open end wrench and hex drive heads are available.
- The torque can be set to any value within the capacity range.
- Models are available ranging from 20 kgf·cm to 2,000 kgf·cm.
- Accuracy : $\pm 3\%$ of indicated value over the full range



GCK

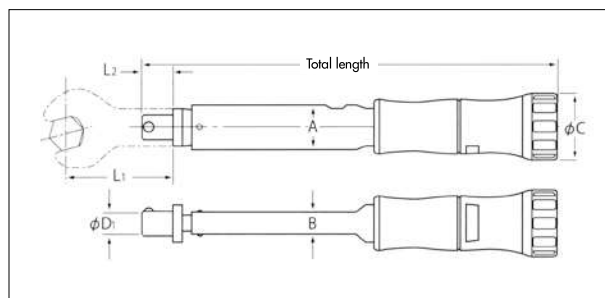

Model (kgf·cm)	Range	Increment	Model (N·m)	Range	Increment	Total length mm	Dimensions (mm)					Weight kg	Replaceable heads	
							Head			Body				
	kgf·cm	kgf·cm		N·m	N·m		phi D1	L1	L2	A	B	C		
60GCK	20 ~ 60	1	N6GCK	2 ~ 6	0.1	174	10	45	13	18.2	9.6	29	0.18	12QCK, 25 (QCK, SCK, RCK, HCK)
120GCK	40 ~ 120	2	N12GCK	4 ~ 12	0.2								0.21	25 (QCK, SCK, RCK, HCK)
250GCK	50 ~ 250	2	N25GCK	5 ~ 25	0.2	209	12	55	16	25	11.4	35	0.37	50 (QCK, SCK, RCK, HCK)
500GCK	100 ~ 500	5	N50GCK	10 ~ 50	0.5	235							0.6	100 (QCK, SCK, RCK, HCK, NCK)
1000GCK	200 ~ 1,000	10	N100GCK	20 ~ 100	1	327	15	65	18	27.5	12.4	38	0.68	
1400GCK	400 ~ 1,400	10	N140GCK	40 ~ 140	1	365	18	80	22	34	15.4	40	1.3	200 (QCK, SCK, RCK, HCK, NCK)
2000GCK	400 ~ 2,000	20	N200GCK	40 ~ 200	2	480								

* is the new model that is applied from 1st January, 2016.