

E-RX-J


Adequate for center distance measurement for holes at different levels



Digital direct reading of center distance measurement "between holes with equal diameter at different levels"

Direct reading system
Digital

E-RX30J

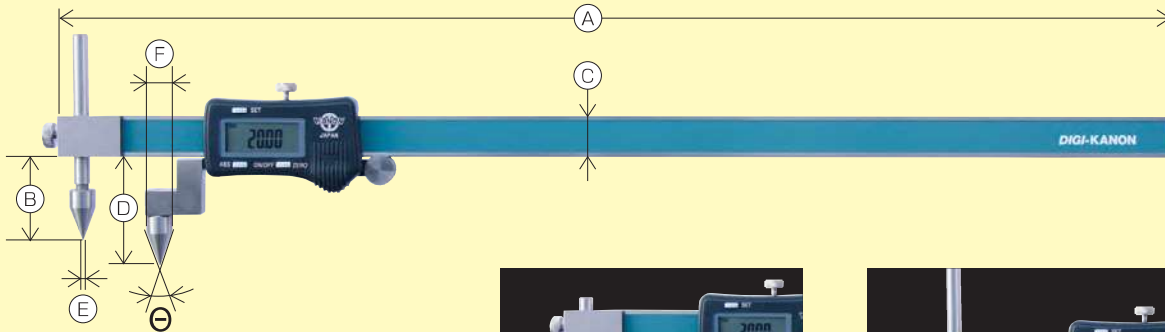

- Since the probe of main scale moves vertically, center distance measurement between holes at different levels is available.



■ E-RX-J : Specifications

(Unit : mm)


Model	Measuring range	Resolution	Maximum permissible error	Minimum hole diameter	Maximum hole diameter	Power supply	Weight	A	B	C	D	E	F	θ
			SMPE											
E-RX30J	10~300	0.01	± 0.05	$\phi 2$	$\phi 9$	SR44 1piece	300g	435	18~52	16	42	$\phi 0.5$	$\phi 10$	40°

RM-DX

Centerline caliper for distance between center to center distance of holes with equal diameter



Adequate for center to center distance measurement!

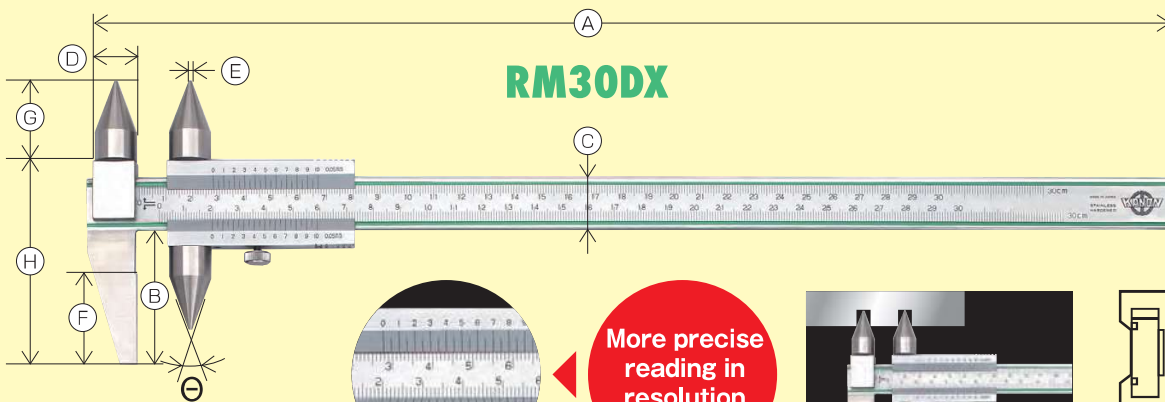

RM30DX

More precise reading in resolution of 0.05!

■ RM-DX : Specifications

(Unit : mm)

Model	Measuring range		Minimum reading	Maximum permissible error	Minimum hole diameter	Maximum hole diameter	Weight	A	B	C	D	E	F	G	H	I	θ
	Pitch for upper side	Pitch for lower side		SMPE													
RM15DX	17~150	9~150	0.05 (Division of 39 mm into 20 equal parts)	± 0.07	$\phi 3$	$\phi 15$	400g	280	50	20	$\phi 16$	$\phi 1.9$	34	31	76	4	40°
RM20DX	17~200	9~200		± 0.08			430g	330									
RM30DX	17~300	9~300		± 0.11			500g	410									
RM60DX	17~600	9~600		± 0.15	1.16kg	780	85	25	69	116	6						
RM100DX	21~1000	11~1000		± 0.15	3.15kg	1200	90	32	$\phi 20$	$\phi 4$	67	35	129	8			