


E-RM30DX

Adequate for distance measurement between wall surface and hole

ONLY ONE

Direct reading type multi-functional digital scale for measuring circular hole center distance that allows "three types of measurement" by replacing the probe

Direct reading system
Digital

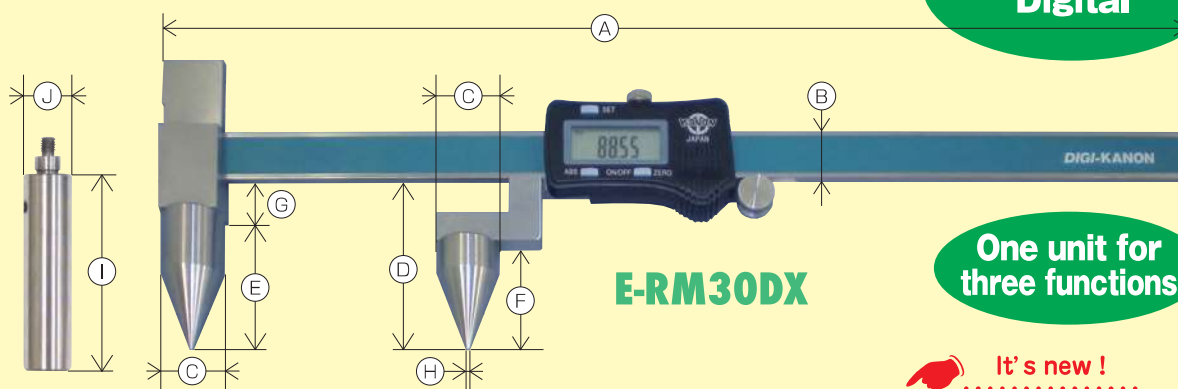


E-RM30DX

One unit for three functions

It's new !


Pitch measurement between holes

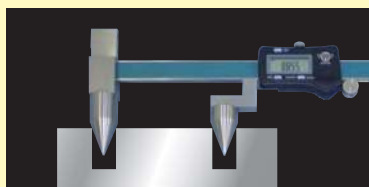

Distance measurement between edge face and hole



Distance measurement between wall surface and hole

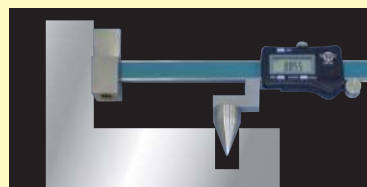

E-RM30DX : Specifications


(Unit : mm)

Model	Measuring range		Resolution	Maximum permissible error	Minimum hole diameter	Maximum hole diameter	Power supply	Weight	A	B	C	D	E	F	G	H	I	J
	Pitch for upper side	Pitch for lower side		SMPE														
E-RM30DX	10~300	20~300	0.01	± 0.05	φ3	φ19	SR44 1piece	550g	430	16	φ20	57	45	35	12	φ2	60	φ15


E-RF30J

E-RF30J overlooking type digital centerline caliper.

An outstanding unit to read the digital display from above.

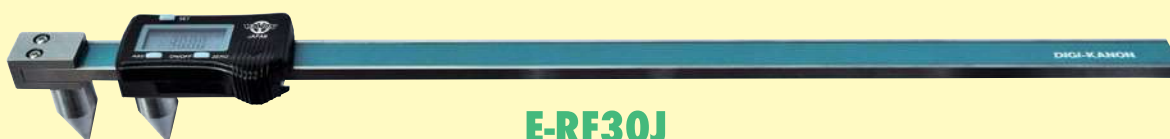

E-RF30J

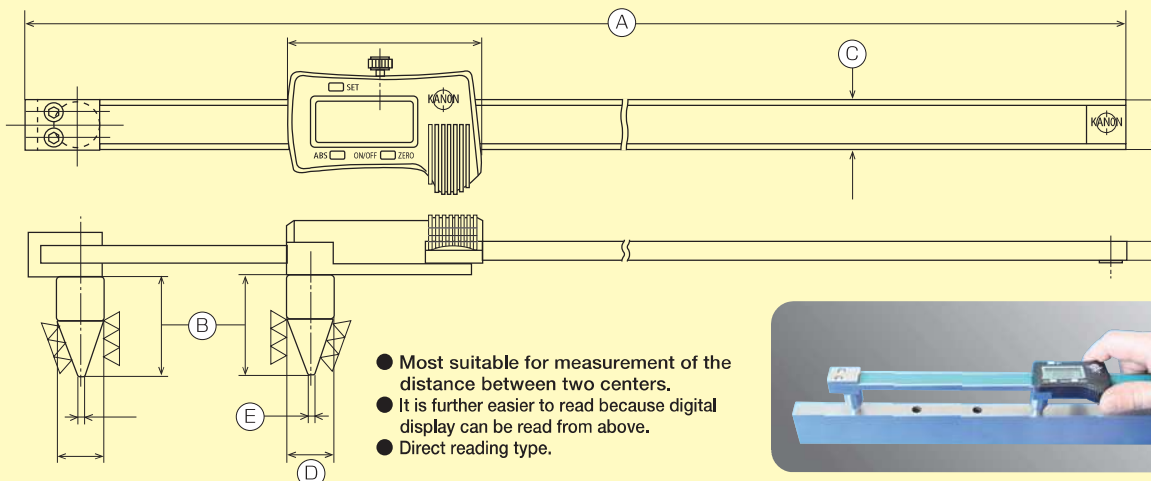

- Most suitable for measurement of the distance between two centers.
- It is further easier to read because digital display can be read from above.
- Direct reading type.



An example of measurement

E-RF30J : Specifications

(Unit : mm)

Model	Measuring range	Resolution	Maximum permissible error	Minimum hole diameter	Maximum hole diameter	Power supply	Weight	A	B	C	D	E	F
			SMPE										
E-RF30J	15~300	0.01	± 0.05	φ3	φ14	SR44 1piece	500g	424	32	16	φ15	φ2	3.3