



Depth gauge adequate for measurement of depth of hole with wide opening

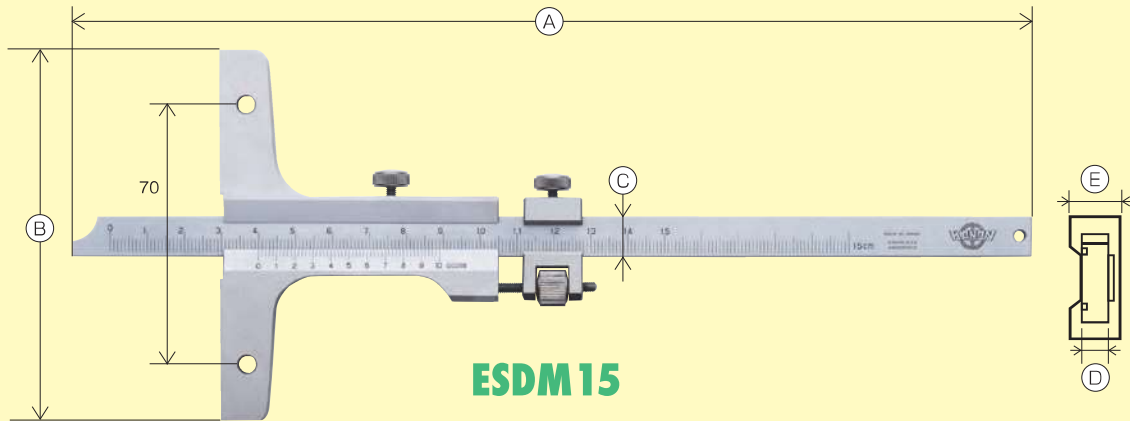


ESDM 15


Measurement of depth (standard configuration)



Measurement of depth (with a span mounted)

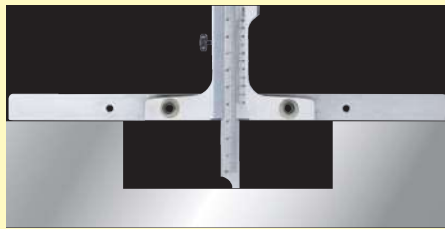

● Since the span size of base can be changed on this depth gauge, not only normal measurement of depth but also measurement of depth of hole with wide opening is available. (Replacement spans are optional.)



■ ESDM : Specifications


(Unit : mm)

Model	Measuring length	Minimum reading	Instrumental error	Weight	A	B	C	D	E
ESDM15	150	0.02 (Division of 49 mm into 50 equal parts)	± 0.03	250g	260	100	11	4	8
ESDM20	200			270g	310				
ESDM30	300		300g	410					

■ Replacement span (Unit : mm)

Model	F	G	Weight
SPAN18 (180mm)	180	16	260g
SPAN26 (260mm)	260		350g
SPAN32 (320mm)	320		400g

Option

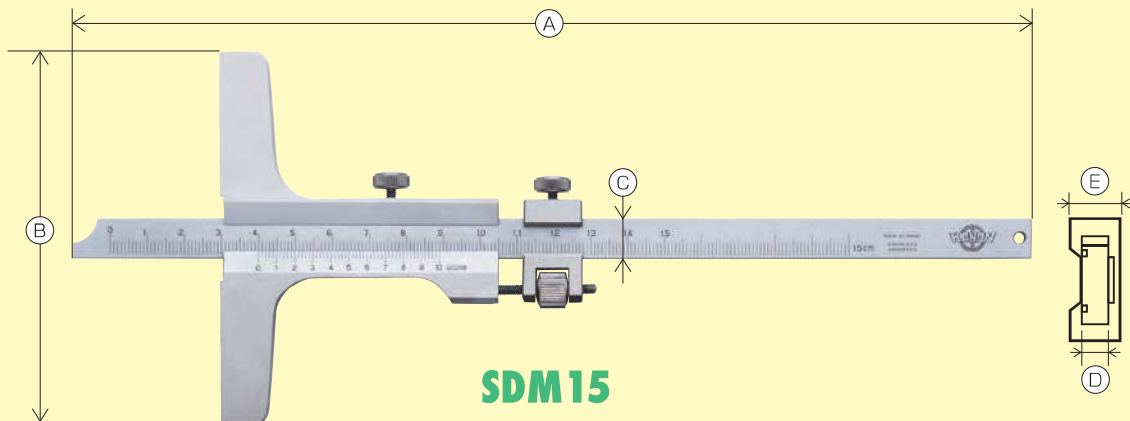

SDM 15

● Model configured as ESDM without span

■ SDM : Specifications

(Unit : mm)

Model	Measuring length	Minimum reading	Instrumental error	Weight	A	B	C	D	E					
SDM15	150	0.02 (Division of 49 mm into 50 equal parts)	± 0.03	250g	260	100	11	4	8					
SDM20	200			270g	310									
SDM30	300			300g	410									
SDM40	400		± 0.04	900g	580									
SDM50	500			± 0.05	950g					680	180	16	5	11
SDM60	600				970g					780				
SDM100	1000	± 0.07	1.66kg	1150	250	20	6							

Measurement of depth

