


Adequate for measurement of flange ring groove



Kanon original flange caliper adequate for measurement of dimensions "within JPI standard"

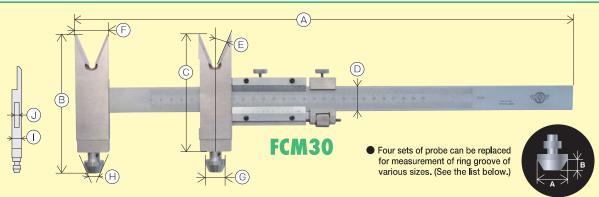


 The dimensions of flange ring groove and gasket can be securely measured.

Method of measurement of groove center diameter



Select a probe (No. 1 to 4) from the list according to the ring No. of groove to be measured. Method of measurement of gasket center diameter



Carry out adjustment by jogging so that the V-shape measurement section is completely in contact with the gasket.

FCM: List of probes

Probe	Dimensions of groove		Ring No.						
Probe	Width	Depth	*Ring numbers indicated in bold type indicate that the center diameter is 100 mm or more.						
No.1 8(A)×4(B)	7.14	5.56	R11						
	8.74	6.35	R12~20, 22, 25, 29, 33, 36, 40, 43, 48, 52, 56, 59, 64, 68, 72, 76, 80						
No.2 14(A)×6(B)	11.91	7.92	R21, 23, 24, 26, 27, 30, 31, 34, 35, 37, 39, 41,						
	11.91	7.92	44, 45, 49, 53, 57, 61, 65, 69, 82, 84, 92, 99						
	13.49	9.52	R28, 32, 46, 73, 85						
	15.09	11.13	R81						
	16.69	11.13	R38, 50, 54, 62, 66, 77, 86, 87						
No.3 20(A)×7.5(B)	19.84	12.70	R42, 47, 70, 74, 88, 89, 93, 94, 95						
	23.01	14.27	R51, 58, 90, 96, 97, 98						
No.4 30 (A)×7.5 (B)	26.97	15.88	R63, 78						
	30.18	17.48	R55, 67, 71, 100						
	33.32	17.48	R60, 75, 91, 101 , 102 , 103						
	36.54	20.62	R79, 104 , 105						

FCM: Specifications

(Onle: Illin															i
Model	Measuring length	Minimum reading	Instrumental error	Weight	Α	В	С	D	Е	F	G	Н	ı	J	
FCM30	33~300	0.02		Approximately 1.2kg	500	135.5	115	25	23°	32	φ8, φ14	46°	10	6	
FCM70	33~700	Division of 49 mm into 50 equal parts	±0.06	Approximately 1.6kg	900	133.5	115	25	23	32	φ20, φ30	40	12	0	

FBM For working

Developed for measuring dimensions of groove used for flange during processing



